

## Indoor Multifunctional Digital Signage (Type B High Brightness Ultra-thin, Floor-standing/Wall-mounted/Hanging)

32"/43"/49"/55"/65"/75"/86"/98" LCD

Screen



4K HD Screen



Smart Split Screen




1000-2500 nits  
Optional



Plug and Play



5 years  
warranty



Mobile APP & Cloud  
Platform Control



Timing  
24/7



Touch Screen  
Optional

YINGLUX Indoor Multifunctional Digital Signage features a high-brightness Ultra-thin body design with sizes from 32" to 98". Built for 24/7 operation, it delivers vivid 4K visuals, flexible installation options (floor-standing, wall-mounted, or hanging), and smart connectivity, making it an ideal solution for retail, hospitality, transportation, education, and more. Design: Industrial-grade structure with slim, elegant body, one-piece frame, and efficient cooling for 24/7 continuous operation.

**Display:** IPS high-definition LCD panel with vivid colors, high brightness, and 4K video/image decoding for premium visuals.

**Smart System:** Multiple mainstream input ports, powerful audio/video decoding, auto signal recognition, and simple operation.

**Installation & Application:** Supports both landscape and portrait modes; widely used in retail, hospitality, transportation, education, finance, government, healthcare, exhibitions, and more.

**High-End Features:** Combines aesthetics, durability, safety, and intelligent functions—making it a premium commercial display solution trusted by many industries.

- Android OS
- Smart split screen
- Auto-timing content control
- LCD Screen
- High Brightness 1000-2500nits Optional
- 3840\*2160 HD Resolution, 2k optional
- 5 years warranty, Life-Long Service
- VIP one-one service, phone & video call available
- >30000 hours long life cycle
- Ultra-narrow bezel design
- Supports Image, Video, and Audio Files
- Cloud Platform, APP, U-Disk / SD-Card content management
- Includes USB, HDMI, and Ethernet Ports
- WiFi and Bluetooth connection available
- Support color and parameters customization

Model NO.	Screen Size	Resolution	Display area	Rated power	Installation	Brightness	Hanging hole spacing
YL-IFW32C	32"	3840*2160/ 1920*1080 Optional	698.4*392.85 mm (H×V)	≤55W	Floor-standing/ wall-mounted /hanging	1000-2500 nits	200*200 mm
YL-IFW43C	43"		940.896*529. 254mm (H×V)	≤157W			400*400 mm
YL-IFW49C	49"		1073.78*604 mm (H×V)	≤200W			600*400 mm
YL-IFW55C	55"		1209.6*680.4 mm (H×V)	≤355W			650*350 *350mm
YL-IFW65C	65"		1428.48*803. 52mm (H×V)	≤310W			1000*300 *400*300
YL-IFW75C	75"		1649.66*927. 936mm (H×V)	≅ 440W			
YL-IFW86C	86"		1895.04*1065 .96mm (H×V)	≅ 950W			
YL-IFW98C	98"		1895.04*1065 .96mm (H×V)	≅ 1130W			

## Display parameters

<b>LCD Grade</b>	New A+ LCD display panel
<b>CPU</b>	RK3568S 2+32G
<b>Viewing angle</b>	89/89/89/89
<b>Display Aspect Ratio</b>	16:9
<b>Backlight type</b>	E-LDE
<b>Refresh rate</b>	60HZ
<b>Surface Treatment</b>	Matte (Haze1%)
<b>Supported colors</b>	16.7M(8-bit)

**Body parameters**

<b>Available colors</b>	Black
<b>Border material</b>	Aluminum profiles
<b>Body material</b>	Hardware cold-rolled steel plate (metal spraying)
<b>Intelligent light sensing</b>	Horizontal and vertical screen optical head CD interface adjustment
<b>Packaging material</b>	Neutral thick carton

**Electrical performance**

Rated voltage	AC110-220V
Standby power	$\leq 1W$
Operating temperature	Temperature $-10^{\circ}C \sim 50^{\circ}C$ / Humidity 10%RH~90%RH
Storage Environment	Temperature $-10^{\circ}C \sim 50^{\circ}C$ / Humidity 10%RH~90%RH

**Packing List**

Complete machine	1
Power cord	1
Remote control	1

**Mainboard Parameter**

CPU	RK3568S, quad-core, up to 2.0GHz
RAM/ Storage	Standard : 2GB+32GB Optional : 4GB+32GB, 8GB+64GB, 8GB+128GB
Operate System	Android 11, Windows OS Optional
Connectivity	Support RJ45 Ethernet, 2.4G WIFI, 5G WIFI Optional, Bluetooth
Video	Support AVI, rm, rmvb, MKV, WMV, MOV, MP4, DAT, VOB, PMP, MPEG, MPG FLV, ASF, and etc.
Image	Support BMP、JPEG、PNG、GIF etc.
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP and etc.
USB	1-way USB-3.0 HOST, 1-way USB 3.0 OTG, 5-way extended USB port
HDMI	Support HDMI output, up to 4K
Content Management	Cloud Platform, APP, U-Disk / SD-Card

## Packaging Information

Screen Size	Single piece gravity carton(mm)	GW	Single piece honeycomb box size(mm)	GW
32"	837*155*545	10.5KG	870*200*560	12.8KG
43"	1082*155*686	15.8KG	1120*200*720	18.7KG
49"	1205*155*760	19KG	1255*200*780	22.9KG
55"	1346*155*835	23.8KG	1395*200*850	27.6KG
65"	1555*195*955	33.8KG	1605*200*960	39KG
75"	\	\	1850*240*1170	51.4KG
86"	\	\	2090*240*1250	60.5KG
98"	\	\	2370*230*1410	92.5KG

## Product Details


### Ultra-narrow high-brightness window advertising machine

32" 43" 49" 55" 65" 75" 86" 98"



## Supports separate scheduling for images and videos

Scheduled power on/off and timed playback save energy, prolong device life, and improve targeted advertising effectiveness

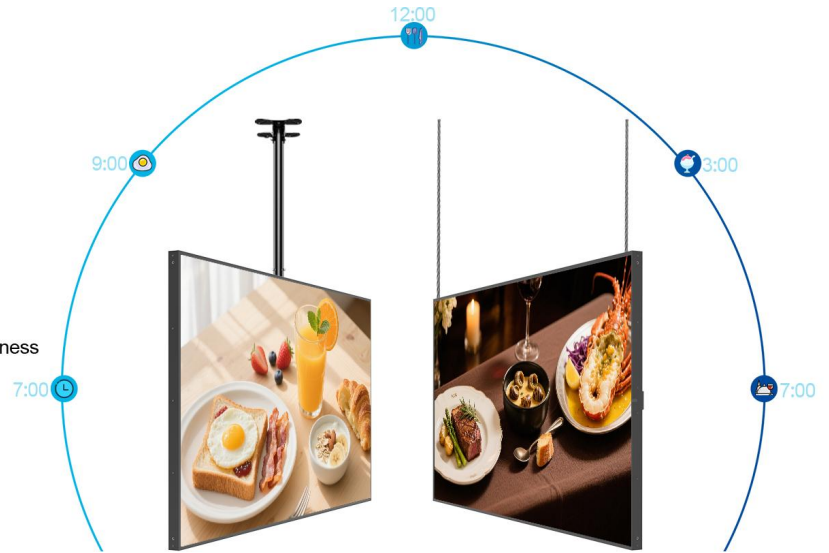

## Intelligent split-screen, displaying different effects

Single-screen | Dual-screen | Triple-screen | Multiple-screen

## Narrow Frame, Ultra-thin body







## 4 different installation methods




## Package


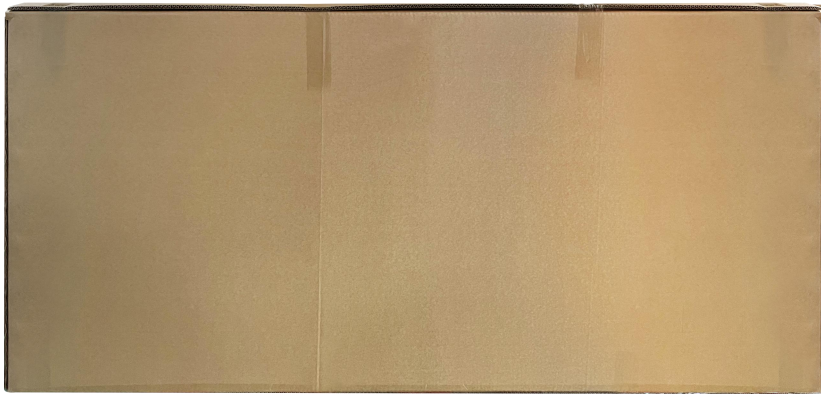


## Applications


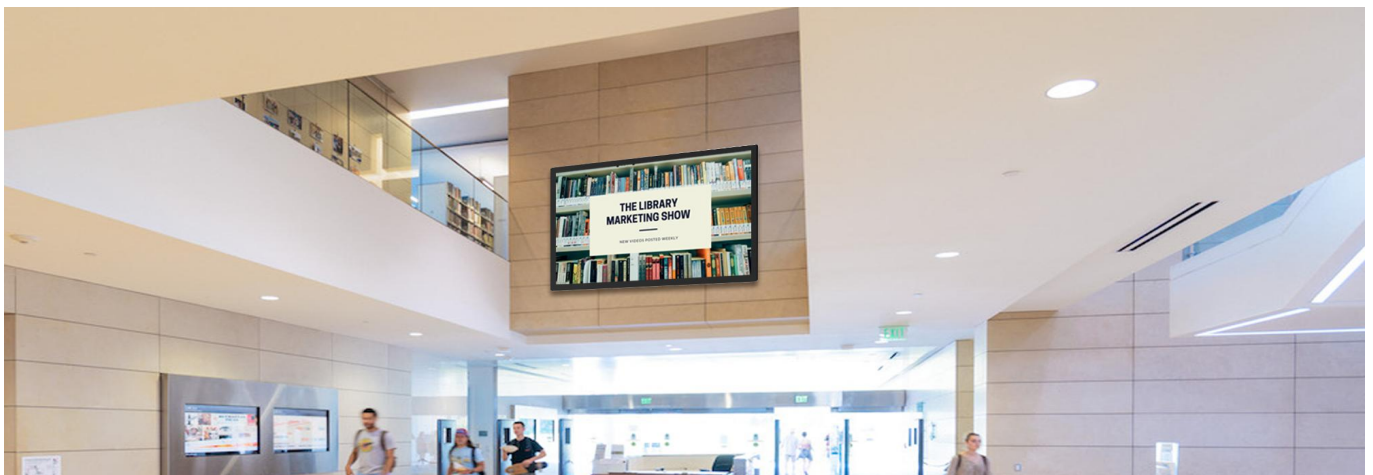


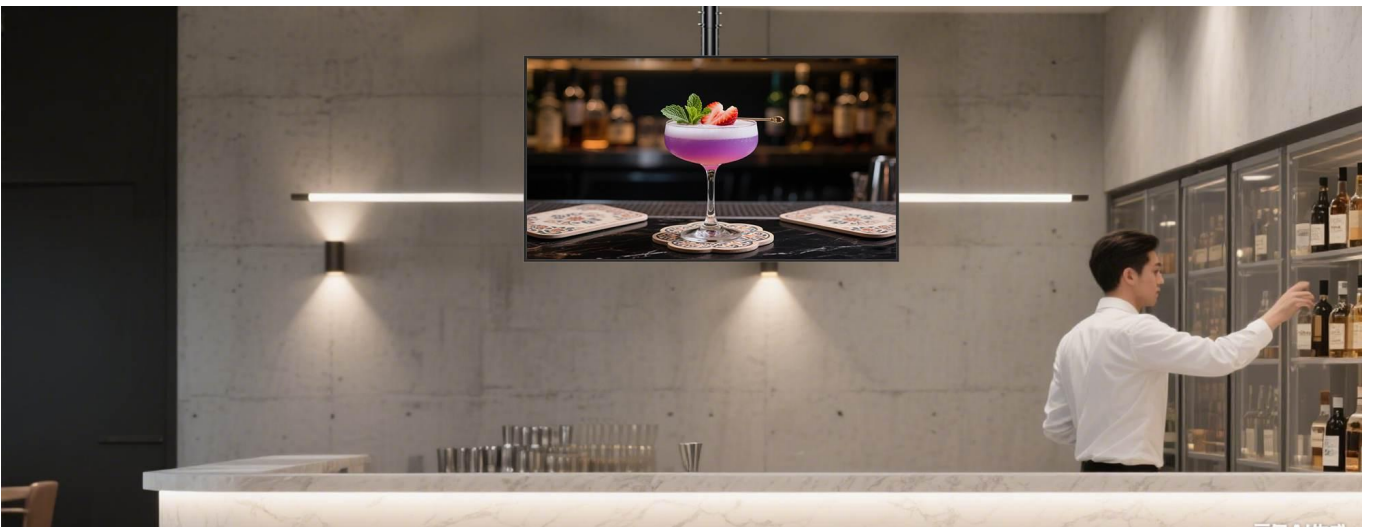





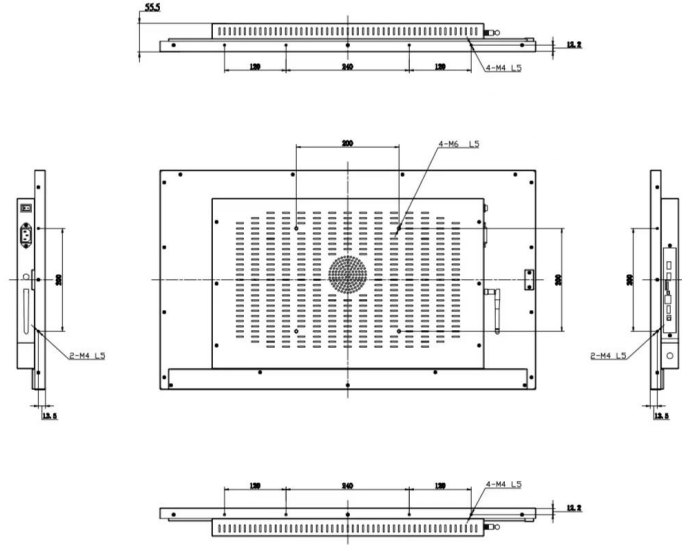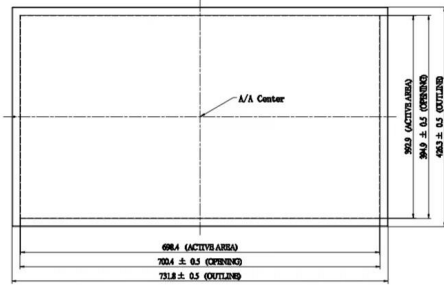

## YL-IFW32C

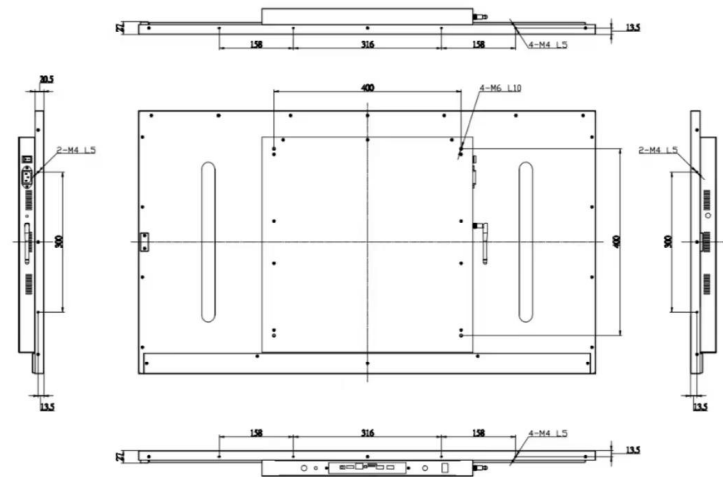
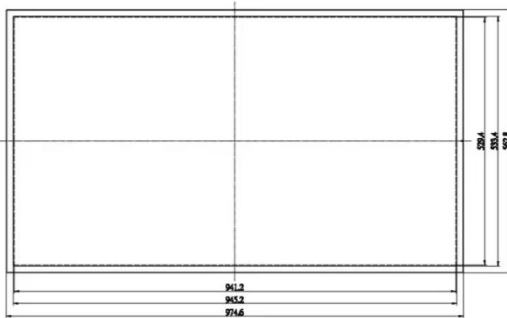


## YL-IFW43C

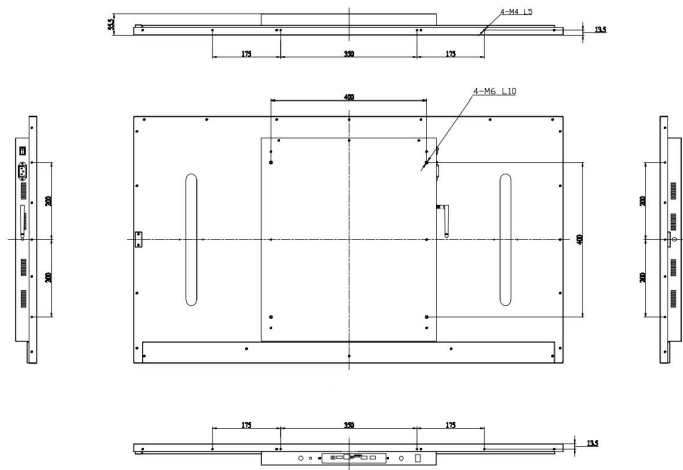
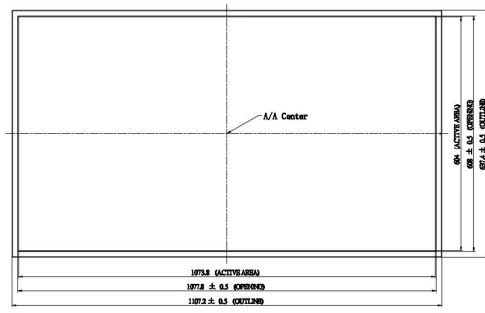


1/1



YL-IFW49C

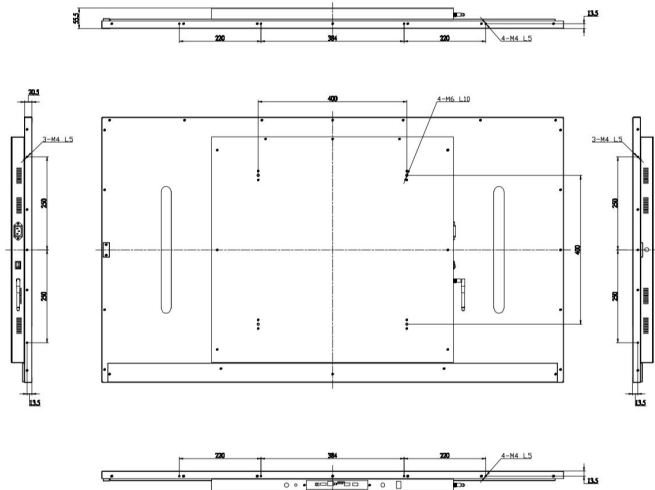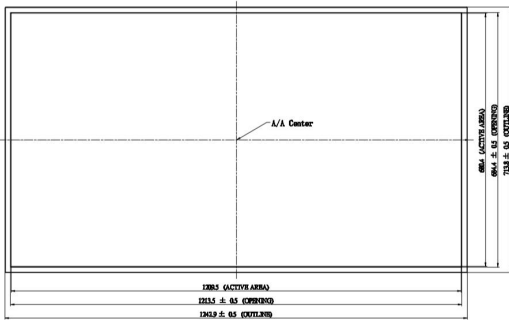



YL-IFW55C

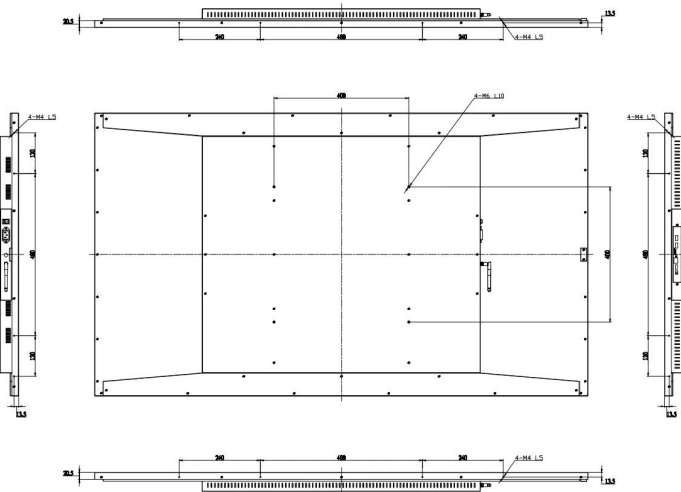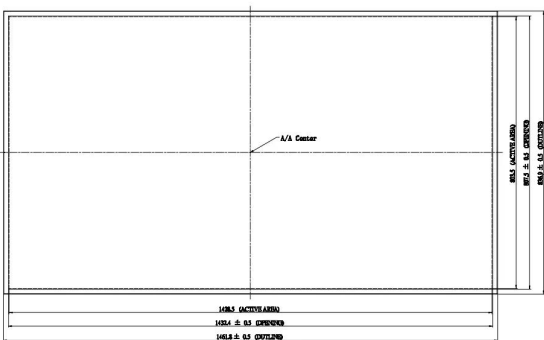

YL-IFW65C

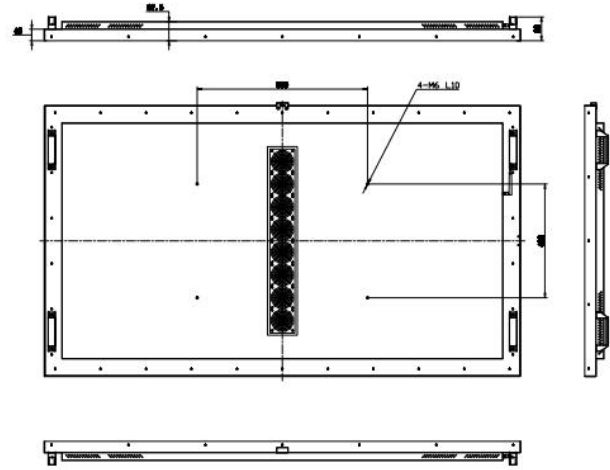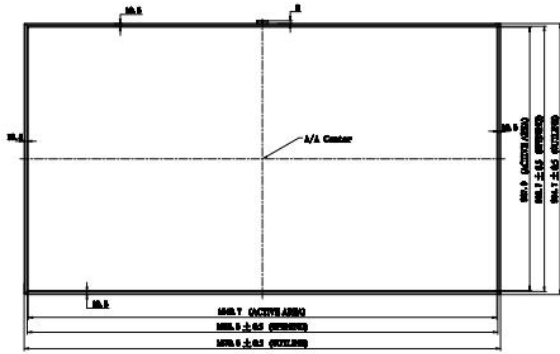

YL-IFW75C

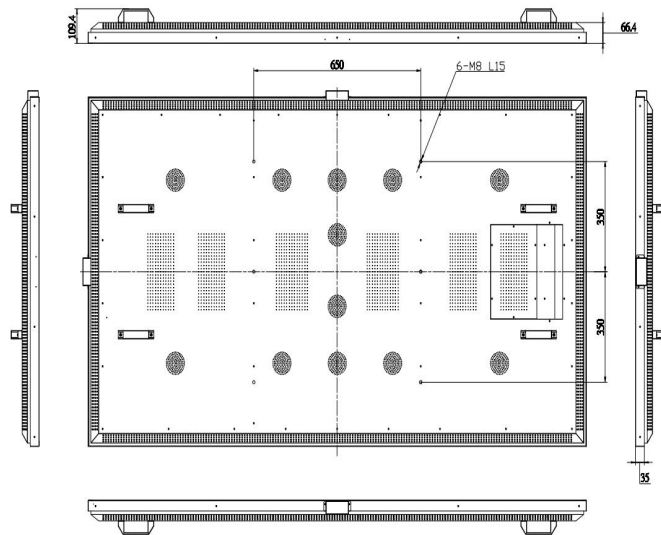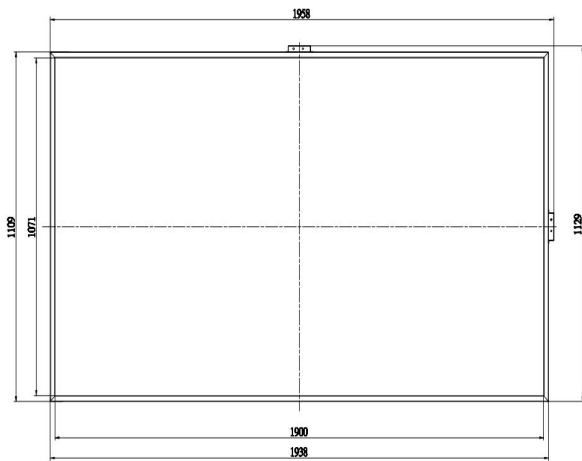

YL-IFW86C

