

## Outdoor Floor Standing Digital Signage

32"/43"/49"/55"/65"/75" LCD Screen

(Touch Screen Optional)



**IP65**  
24/7 Work



**10KV Lightning**  
Protection




**High Brightness**  
2500 nits Optional



**Easy**  
Installation



**Tempered**  
Glass



**Mobile APP &**  
**Cloud Platform**  
Control



**Timing**



**Touch Screen**  
Optional

YINGLUX Display outdoor floor standing digital signage type A series have different sizes such as 32" /43" /49" /55" / 65" /75" screen and IP65 waterproof grade are designed for displaying information to your customers and clients with No environmental limitations. This product can be used in a variety of situations, such as: banks, hospitals, schools, squares, restaurants, etc. The information can be seen clearly under the sun because the high brightness screen with 2000 nits or 3000 nits. No matter what industry you work in, we provide customized parameters you need.

- Android 11 OS
- 10KV Lightning Protection and air Switch
- Tempered anti-Glare LCD Screen
- 2000 nits high brightness, 2500cd/m<sup>2</sup> Optional
- 60000 hours long life cycle
- IP65 waterproof
- 1 year warranty, Life-Long Service
- VIP one-one service, phone & video call available
- Auto-timing switch ON/OFF
- Supports Image, Video, and Audio Files
- 1920 x 1080 HD Resolution, 4k optional
- Cloud Platform, APP, U-Disk / SD-Card content management
- Includes USB, HDMI, and Ethernet Ports
- WiFi and Bluetooth connection available
- Support color and parameters customization

Model NO.	YL-OFS32A	YL-OFS43A	YL-OFS49A	YL-OFS55A	YL-OFS65A	YL-OFS75A
Screen Size	32"	43"	49"	55"	65"	75"
Input Power	180W	230W	350W	400W	490W	950W

#### Screen Parameter

Resolution	1080P (1920*1080) 4k(3840*2160) optional
Color depth	16.7M
Aspect Ratio	9:16
Brightness	2000cd/m <sup>2</sup> (Clearly under the sun), 2500cd/m <sup>2</sup> Optional
Contrast	4000:1
Viewing Angle	178°(H) / 178°(V)
Response Time	5ms
Life Cycle	≥60000 hours

#### Mainboard Parameter

CPU	RK3568S, quad-core, up to 2.0GHz
RAM/ Storage	Standard : 2GB+32GB, Optional : 4GB+32GB, 8GB+64GB, 8GB+128GB
Operate System	Android 11, Windows OS Optional
Connectivity	Support RJ45 Ethernet, 2.4G WIFI, 5G WIFI Optional, Bluetooth
Video	Support AVI, rm, rmvb, MKV, WMV, MOV, MP4, DAT, VOB, PMP, MPEG, MPG FLV, ASF, TS, TP, 3GP, MPG and etc.
Image	Support BMP、JPEG、PNG、GIF etc.
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP and etc.
USB	1-way USB-3.0 HOST, 1-way USB 3.0 OTG, 5-way extended USB port
HDMI	Support HDMI output, up to 4K
Content Management	Cloud Platform, APP, U-Disk / SD-Card


#### Other Parameter

Input Voltage	AC100-240V
Lightning Protector	10 KV
Timing Function	Microcomputer timer switch ON/OFF the machine in different periods
Auto-Cool System	Automatically adjust air cooling system, energy saving, and extended fan service life.
Switch	Air Protection Switch
Production	OCP, OVP, RCD
Product Color	White / Black / Silver / Grey or Customized
Camera	Optional
Speakers	2x10W Speakers
Humidity	10%~90%
Working Temperature	-20℃~50℃
Material	Steel, Tempered Glass
Certificate	ISO9001, CE, RoHs, FCC
Includes	Remote Controller, key, 5 feet Power Cord
Warranty	1 Years ( <b>One-one VIP Life-Long Service</b> , Phone & Video Calls Available)

#### Package Parameter

Model NO.	Wight	Product Size	Package Size
OFS32A	231.48 lbs	69.62"x23.3"x13.78"	76.38"x29.92"x17.32"
OFS43A	242.50 lbs	72.83"x29.52"x15.75"	84.25"x37.8"x20.08"
OFS49A	279.99 lbs	75.77"x33.07"x15.75"	86.61"x40.55"x20.47"
OFS55A	297.62 lbs	78.74"x34.65"x15.75"	88.98"x40.94"x20.47"
OFS65A	396.83 lbs	87.97"x40.16"x15.75"	94.49"x52.76"x17.32"
OFS75A	661.38 lbs	97.81"x44.39"x17.72"	99.61"x54.72"x17.32"


# Product Details

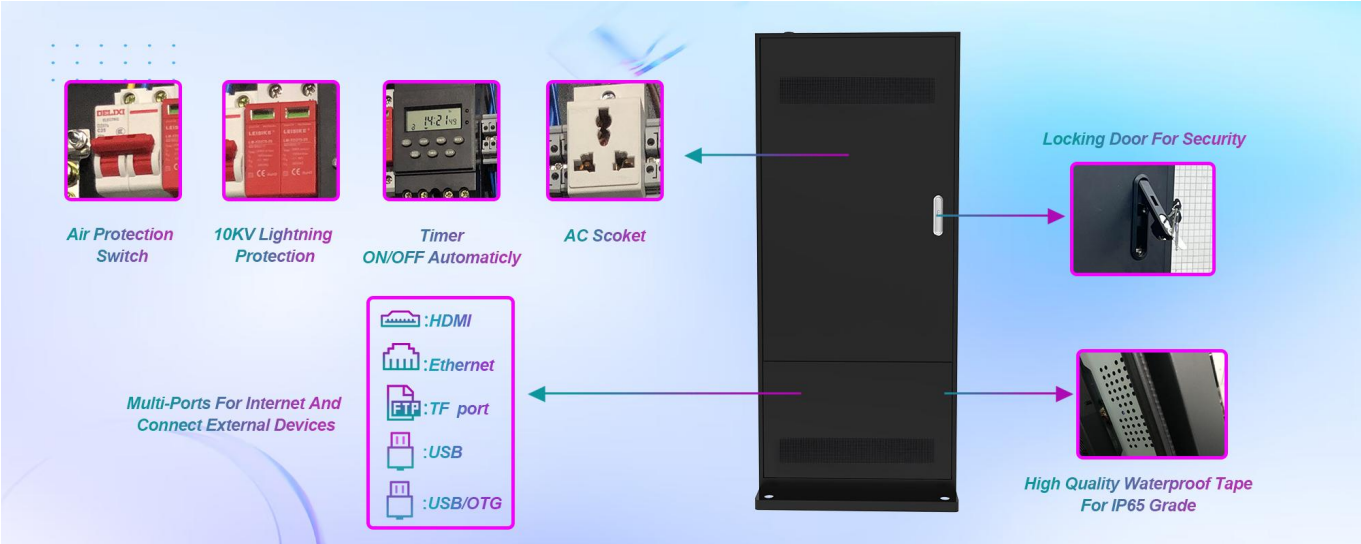


# Package




# Various Control Methods

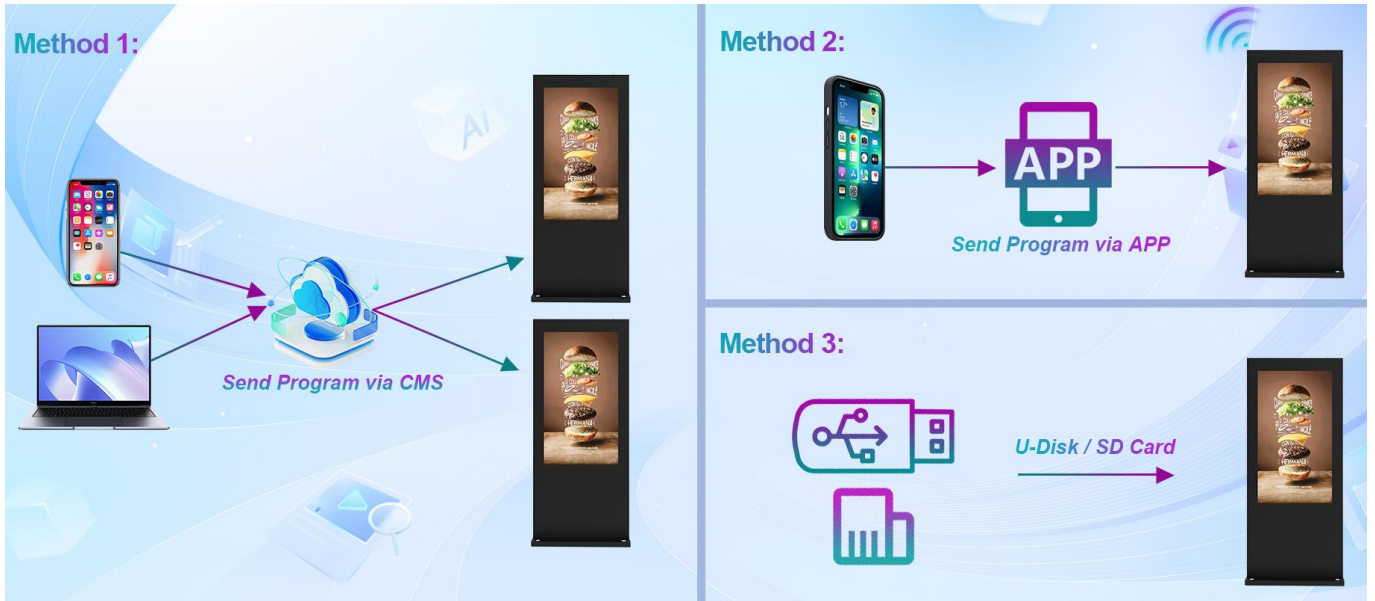

# Applications

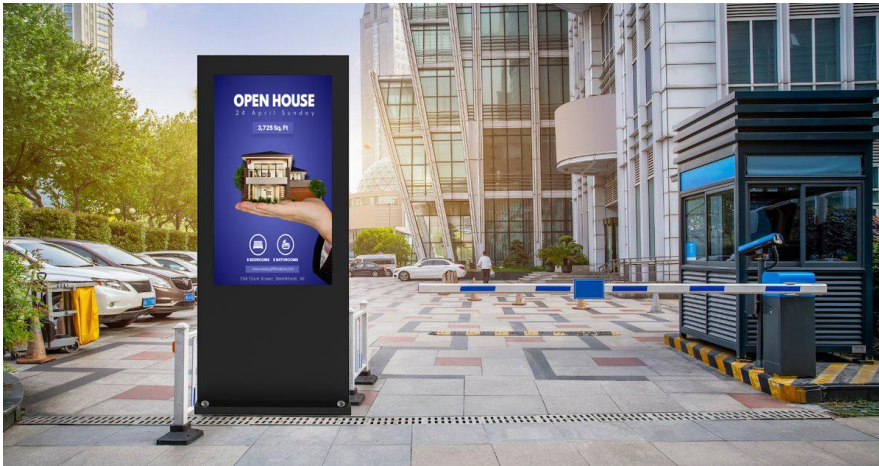


Sales center

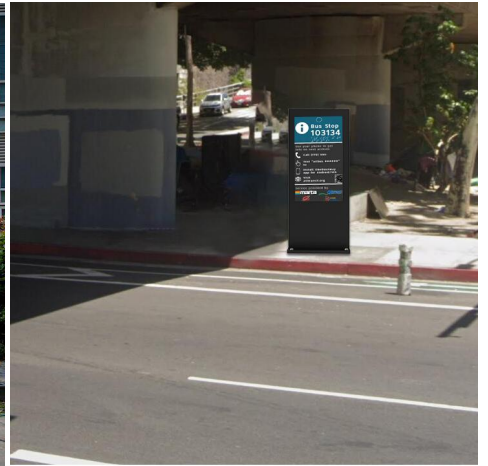

Roadside Billboard



Hotel

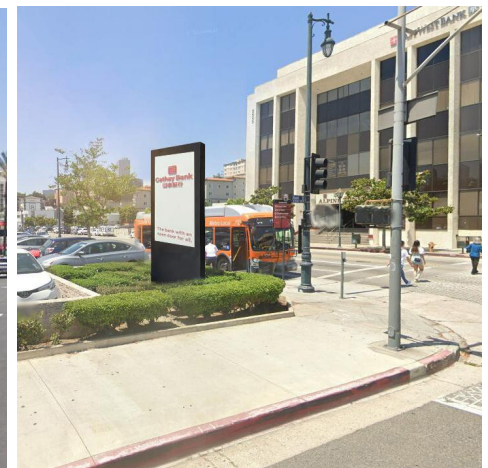

Bank