

TM series

TAXI Mobile advertising taxi roof led display



Aluminum



High
Contrast



High
Definition



High
Refresh



Auto
Brightness




Waterproof



Antistatic

TB series

TAXI Mobile advertising taxi roof led display

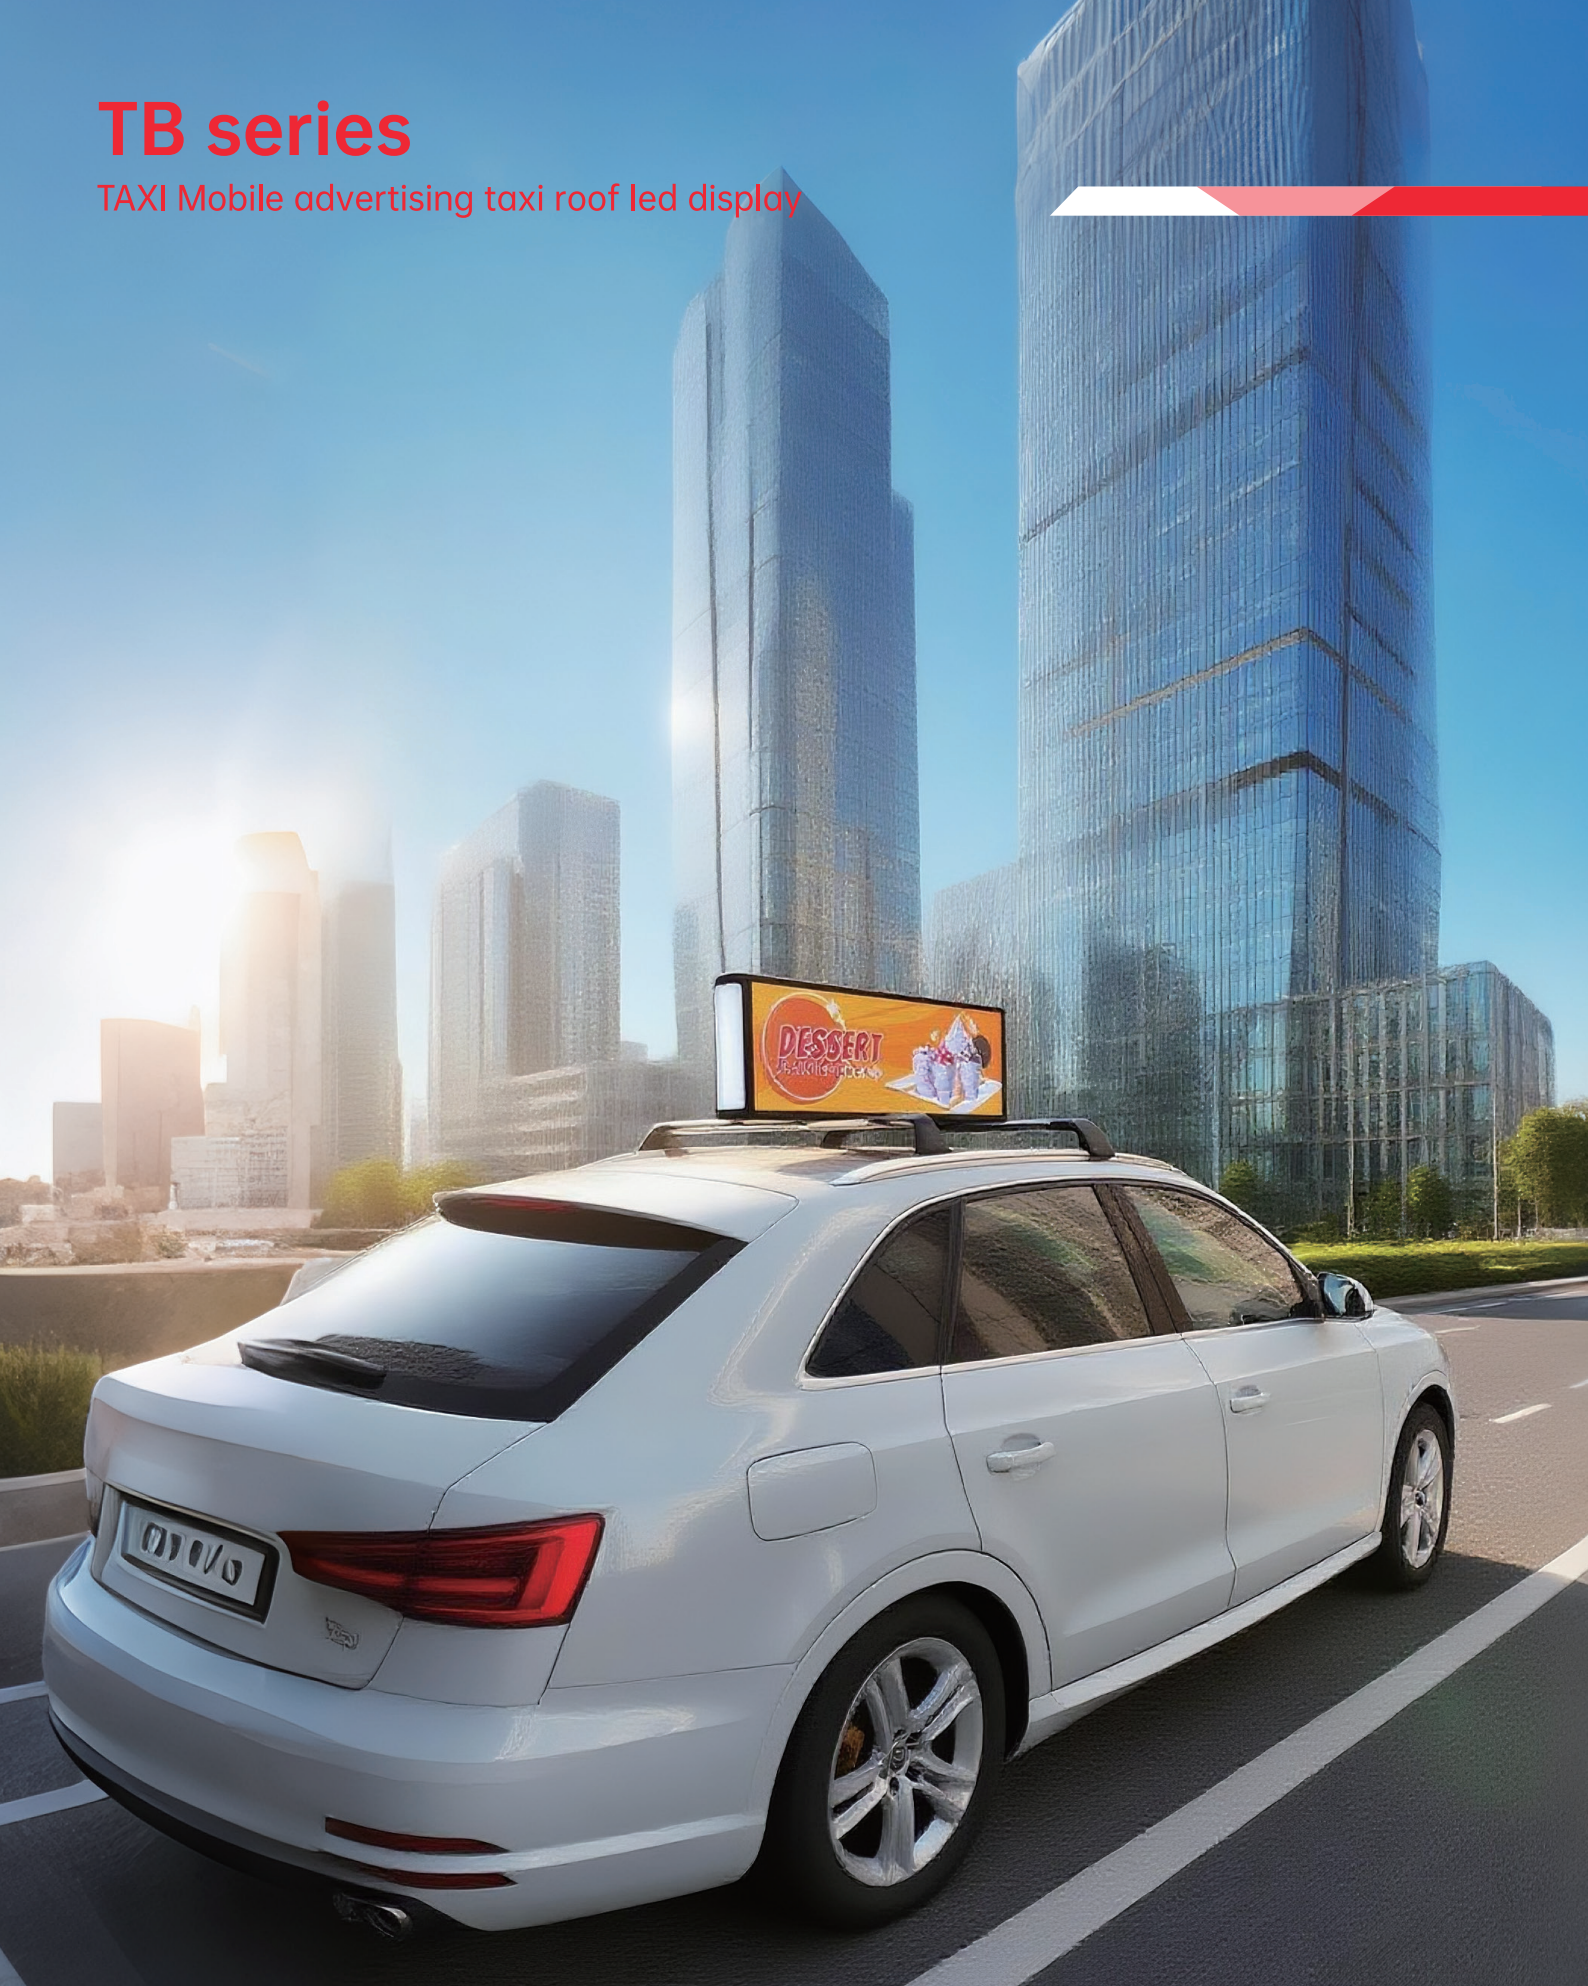

Anti-Settlement



Seismic Resistance



Anti-UV



Lightning Proof



Snowproof



Energy Efficiency



Easy Maintenance



Rail Design



Adjustable Angle

TC series

TAXI Mobile advertising taxi roof led display



Low Drag



Matte



GPS



4G



Wifi




USB



RJ45




TM series parameter

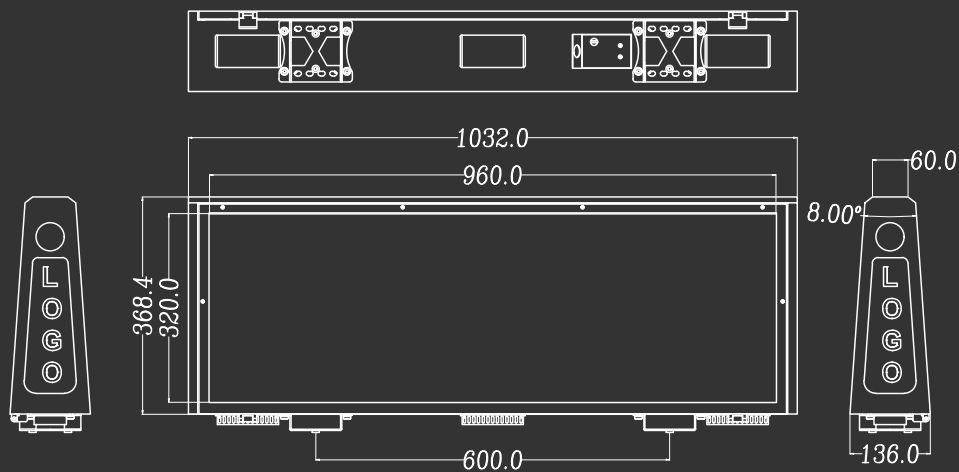

SPECIFICATION(参数)

Item(型号)	OTB-P2.5	OTB-P3	OTB-P4	OTB-P5
Pixel Pitch (mm)(间距)	2.5	3.076	4	5
LED type(灯珠型号)	SMD 1415	SMD 1415	SMD 1921	SMD 1921
Pixel density (pixel/m²)(密度)	160,000	105,625	62,500	40,000
Module dimension (W*H)(模组尺寸)	320×160mm			
Cabinet dimension (W*H*D)(产品尺寸)	1032×369×136 mm			
Cabinet resolution (W*H*Side)(产品分辨率)	384×128×2 pixels	312×104×2 pixels	240×80×2 pixels	192×64×2 pixels
Cabinet weight (Kg/unit)(重量)	19kg±0.5kg	18kg±0.5kg	17kg±0.5kg	17kg±0.5kg
Cabinet material(箱体材质)	Iron			
Access(维护)	Front access			
Ingress protection(防护等级)	IP65			
Brightness (nits/m²)(亮度)	4500nits			
Viewing angle(视角)	V140° H140°			
Max. power consumption (W/m²)(最大功率)	360W/set			
Ave. power consumption (W/m²)(平均功率)	150W/set			
Input voltage(输入电压)	DC12V, (DC9~36V)			
Refresh rate (Hz)(刷新率)	3840			
LED lifespan (Hrs)(灯后寿命)	100000			
Operation temperature(°C)(工作温度)	-40~75			
Storage temperature(°C)(存储温度)	-40~80			
Working humidity (RH)(工作湿度)	0%~95%			
Control PC (操作系统)	Windows, Andriod , Mac OS, Chrome			
Control way(控制方式)	Asynchronizes with PC/Mobile/Labtop/PAD			
Control system(通讯方式)	Andriod+4G+AP+WIFI+GPS+8GB Flash			


TB series parameter

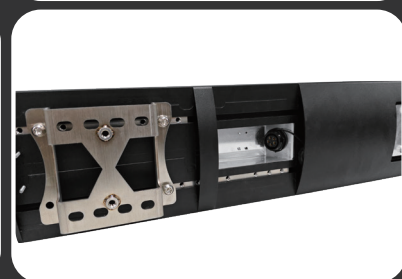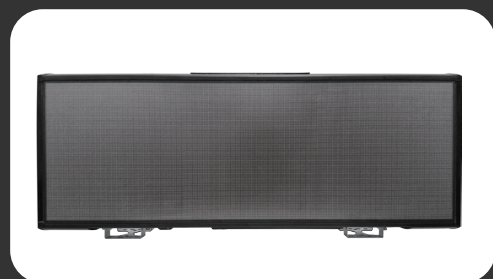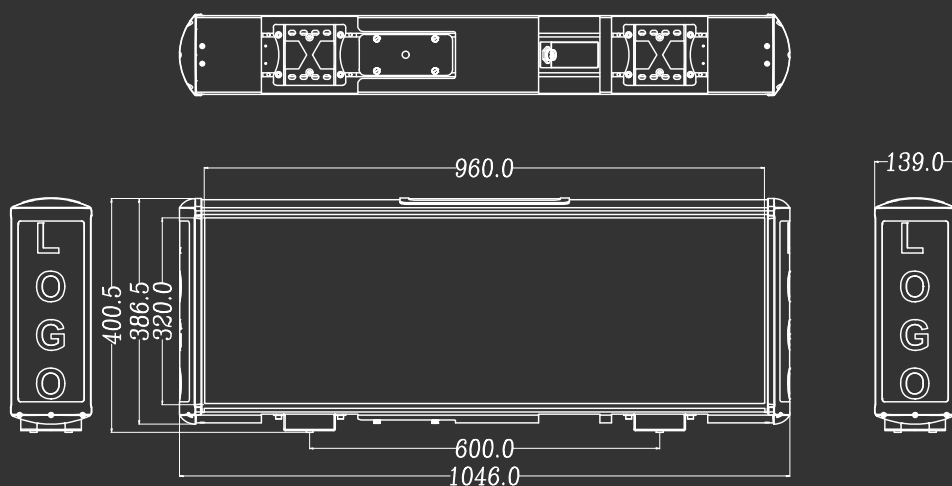

SPECIFICATION(参数)

Item(型号)	OTB-P2	OTB-P2.5	OTB-P3	OTB-P4	OTB-P5
Pixel Pitch (mm)(间距)	2	2.5	3.076	4	5
LED type(灯珠型号)	SMD 1112	SMD 1415	SMD 1415	SMD 1921	SMD 1921
Pixel density (pixel/m²)(密度)	250,000	160,000	105,625	62,500	40,000
Module dimension (W*H)(模组尺寸)	320×160mm				
Cabinet dimension (W*H*D)(产品尺寸)	1046×400×139mm				
Cabinet resolution (W*H*Side)(产品分辨率)	480×160×2 pixels	384×128×2 pixels	312×104×2 pixels	240×80×2 pixels	192×64×2 pixels
Cabinet weight (Kg/unit)(重量)	22kg±0.5kg	22kg±0.5kg	21kg±0.5kg	20kg±0.5kg	20kg±0.5kg
Cabinet material(箱体材质)	Aluminum				
Access(维护)	Front access				
Ingress protection(防护等级)	IP65				
Brightness (nits/m²)(亮度)	4000-4500nits				
Viewing angle(视角)	V140° H140°				
Max. power consumption (W/m²)(最大功率)	480W/set				
Ave. power consumption (W/m²)(平均功率)	150W/set				
Input voltage(输入电压)	DC12V, (DC9~36V)				
Refresh rate (Hz)(刷新率)	3840				
LED lifespan (Hrs)(灯后寿命)	100000				
Operation temperature(°C)(工作温度)	-40~75				
Storage temperature(°C)(存储温度)	-40~80				
Working humidity (RH)(工作湿度)	0%~95%				
Control PC (操作系统)	Windows, Andriod , Mac OS, Chrome				
Control way(控制方式)	Asynchronizes with PC/Mobile/Labtop/PAD				
Control system(通讯方式)	Andriod+4G+AP+WiFi+GPS+8GB Flash				

TC series parameter

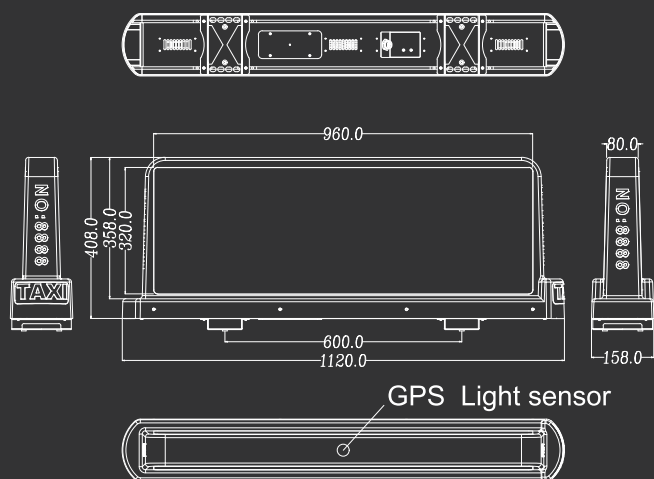

SPECIFICATION(参数)

Item(型号)	OTB-P2	OTB-P2.5	OTB-P3	OTB-P4
Pixel Pitch (mm)(间距)	2	2.5	3.076	4
LED type(灯珠型号)	SMD 1112	SMD 1415	SMD 1415	SMD 1921
Pixel density (pixel/m ²)(密度)	250,000	160,000	105,625	62,500
Module dimension (W*H)(模组尺寸)	320×160mm			
Cabinet dimension (W*H*D)(产品尺寸)	1120×408×158 mm			
Cabinet resolution (W*H*Side)(产品分辨率)	480×160×2 pixels	384×128×2 pixels	312×104×2 pixels	240×80×2 pixels
Cabinet weight (Kg/unit)(重量)	16kg±0.5kg	19kg±0.5kg	18kg±0.5kg	17kg±0.5kg
Cabinet material(箱体材质)	Aluminum			
Access(维护)	Front access			
Ingress protection(防护等级)	IP65			
Brightness (nits/m ²)(亮度)	4000-4500nits			
Viewing angle(视角)	V140° H140°			
Max. power consumption (W/m ²)(最大功率)	360W/set			
Ave. power consumption (W/m ²)(平均功率)	150W/set			
Input voltage(输入电压)	DC12V, (DC9~36V)			
Refresh rate (Hz)(刷新率)	3840			
LED lifespan (Hrs)(灯后寿命)	100000			
Operation temperature(°C)(工作温度)	-40~75			
Storage temperature(°C)(存储温度)	-40~80			
Working humidity (RH)(工作湿度)	0%~95%			
Control PC (操作系统)	Windows, Andriod , Mac OS, Chrome			
Control way(控制方式)	Asynchronizes with PC/Mobile/Labtop/PAD			
Control system(通讯方式)	Andriod+4G+AP+WIFI+GPS+8GB Flash			

